



Multi Company Import

Mass import of DSI files

TITLE	Multi Company Import
AUTHOR	Docusnap Consulting
DATE	12/12/2023
VERSION	2.0 valid from 11/27/2023

This document contains proprietary information and may not be reproduced in any form or parts whatsoever, nor may be used by or its contents divulged to third parties without written permission of Docusnap GmbH. All rights reserved.

CONTENTS

1. START	4
2. MULTI-COMPANY IMPORT	5
2.1 STORING STRUCTURE ON THE FILE SYSTEM	5
2.2 IMPORT	6

1. START

Script-based inventories exist in Docusnap. Here, the inventory is executed locally on a system via an executable file and the inventoried information is saved in an DSI file. The following script-based inventories are available:

- Windows
- Linux
- Mac
- Microsoft SharePoint
- Microsoft Exchange
- Active Directory
- DNS
- DHCP
- DFS
- Veeam

The multi-company import offers you the option of importing DSI files across clients and domains within a single order.

2. MULTI-COMPANY IMPORT

2.1 STORING STRUCTURE ON THE FILE SYSTEM

The prerequisite for simultaneous import is the following structure within the file system:

- | | | |
|---------------|----------------------|--|
| 1. 1st level: | Root directory | E.g. DocusnapImport (name is freely choosable) |
| 2. 2nd level: | Company#Domain.FQDN | E.g. Docusnap Sports#docusnapsports.com |
| 3. 3rd level: | Storage of XML files | |

2.2 IMPORT

XML files can be imported into Docusnap via the Global Script Import.

You can find the wizard in


- Discovery - All wizards - Multi-company import
- Inventory - All Wizards - Multi-company import
- All jobs - All wizards - Multi-company import

In the first step, select the appropriate discovery service. When selecting the discovery service, make sure that it has access to the path or paths defined in the next step.

When selecting the directory, the root directory is determined - the appropriate subfolders must be located under it, according to the scheme described previously.

Optionally, the scan results can be archived (otherwise they will be deleted after import). In case of timed execution, directories newly added to the folder structure are taken into consideration.

When scheduling automatic import, it is important that the user running the Discovery Service has read and write access to the specified root directory and below.

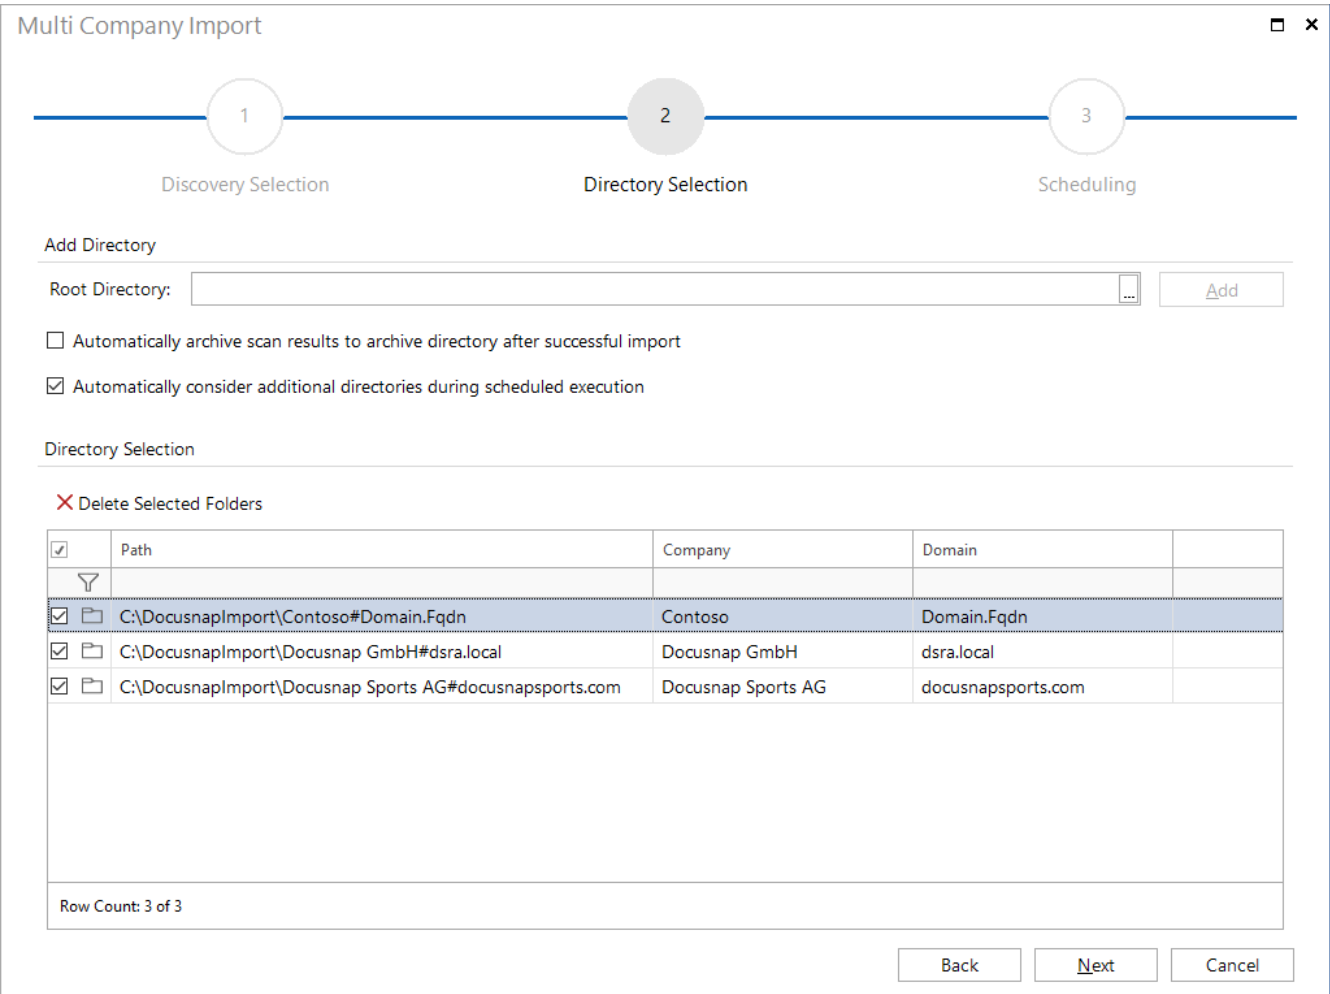

Multi Company Import

1 Discovery Selection 2 Directory Selection 3 Scheduling

Add Directory

Root Directory:

☐ Automatically archive scan results to archive directory after successful import

☒ Automatically consider additional directories during scheduled execution

Directory Selection

☒ Delete Selected Folders

<input checked="" type="checkbox"/>	Path	Company	Domain
<input checked="" type="checkbox"/>	C:\DocusnapImport\Contoso#Domain.Fqdn	Contoso	Domain.Fqdn
<input checked="" type="checkbox"/>	C:\DocusnapImport\Docusnap GmbH#dsra.local	Docusnap GmbH	dsra.local
<input checked="" type="checkbox"/>	C:\DocusnapImport\Docusnap Sports AG#docusnapsports.com	Docusnap Sports AG	docusnapsports.com

Row Count: 3 of 3

Figure 1 - Multi-company import

LIST OF FIGURES

FIGURE 1 - MULTI-COMPANY IMPORT 6

VERSION HISTORY

Date	Description
11/03.2021	Version 1.0 - finished
11/27/2023	Version 2.0 – Revision Docusnap 13

